# 华通威通讯

08 月刊 · 2014 年

NO 32

全球认证 本地服务 Local Service For Global Certification

EMC 安规 环境及能效 化学



华通威取得 IEC62368- 第二版 CBTL 资质 |03

音视频安规标准 IEC 60065:2014 发布 |04

EN 61000-4-6:2014 标准升级信息 |05

关于 EN 55014-1：2006/A2：2011 实验室资格变更的证书确认 |06

# 目录 | CONTENTS



CNAS

A2LA

AQSIQ

IEC CB

CCIC

“ ”

518057

Http://www.szhtw.com.cn

3 1

86-755-26748019

86-755-26748089

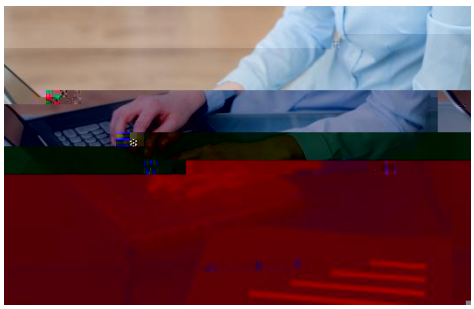
E-mail sale@szhtw.com.cn

EMC 86-755-26748099

E-mail emc@szhtw.com.cn

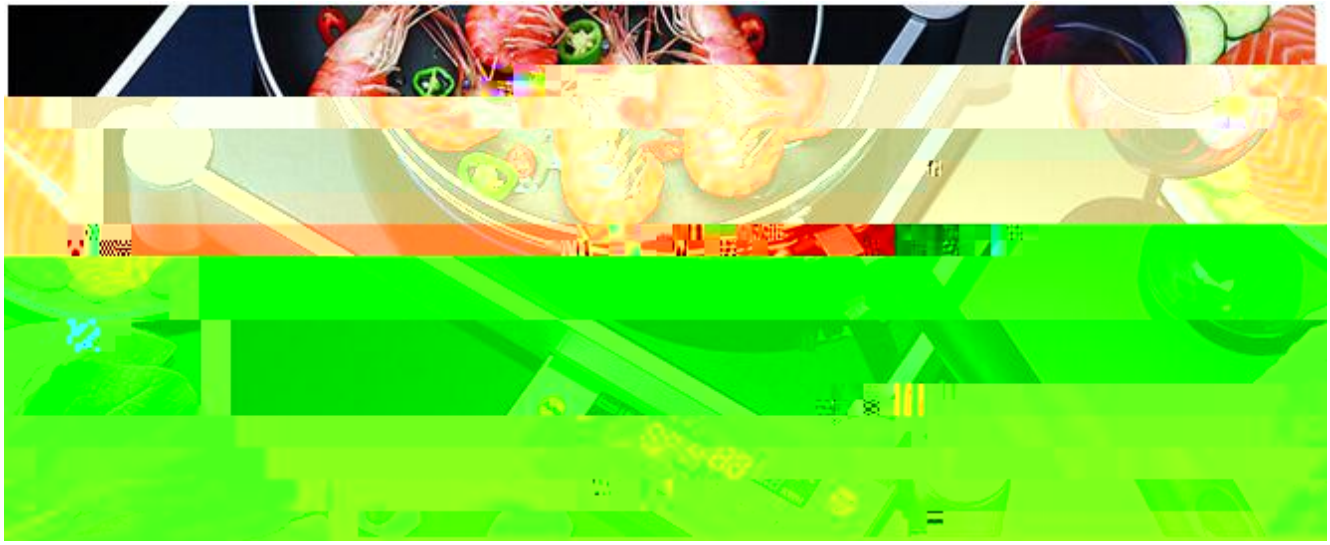
86-755-26748077








UL
FCC
GB



| | | | | | |
|---|---|---|---|---|---|
| 2 | – | 0,009 – 0,050 | 110 | – | 12 |
| 2 | | | 90 | | 10 |
| | Decreasing linearly with logarithm of frequency to | – | 0,050 – 0,150 | Decreasing linearly with logarithm of frequency to | – |
| | 92 | | | 80 | |
| 6 | 72 | 62 | | 66 | 5 |
| g linearly rithm of ncy to | Decreasing linearly with logarithm of frequency to | Decreasing linearly with logarithm of frequency to | 0,150 – 0,5 | Decreasing linearly with logarithm of frequency to | Decreasin with loga freque |
| 6 | 62 | 52 | | 56 | 4 |
| 6 | 56 | 46 | 0,5 – 5 | 56 | 4 |
| ) | 60 | 50 | 5 – 30 | 60 | 5 |

Table B.2 – Magnetic field strength limits

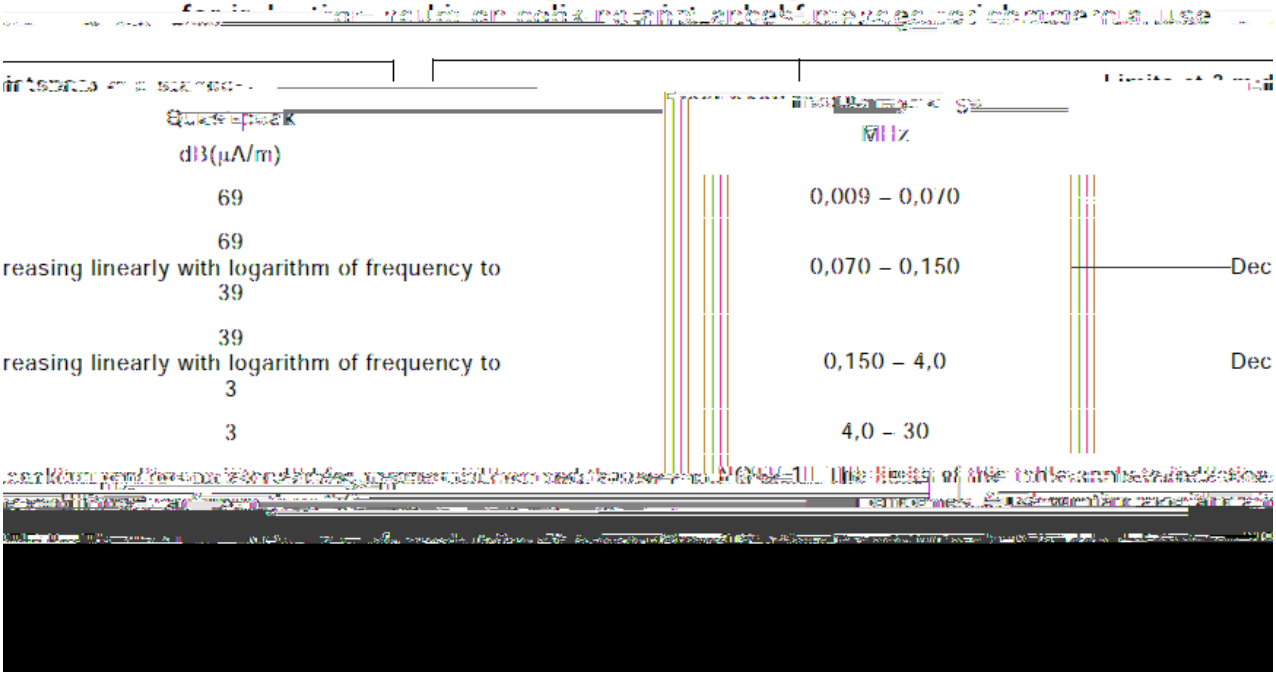
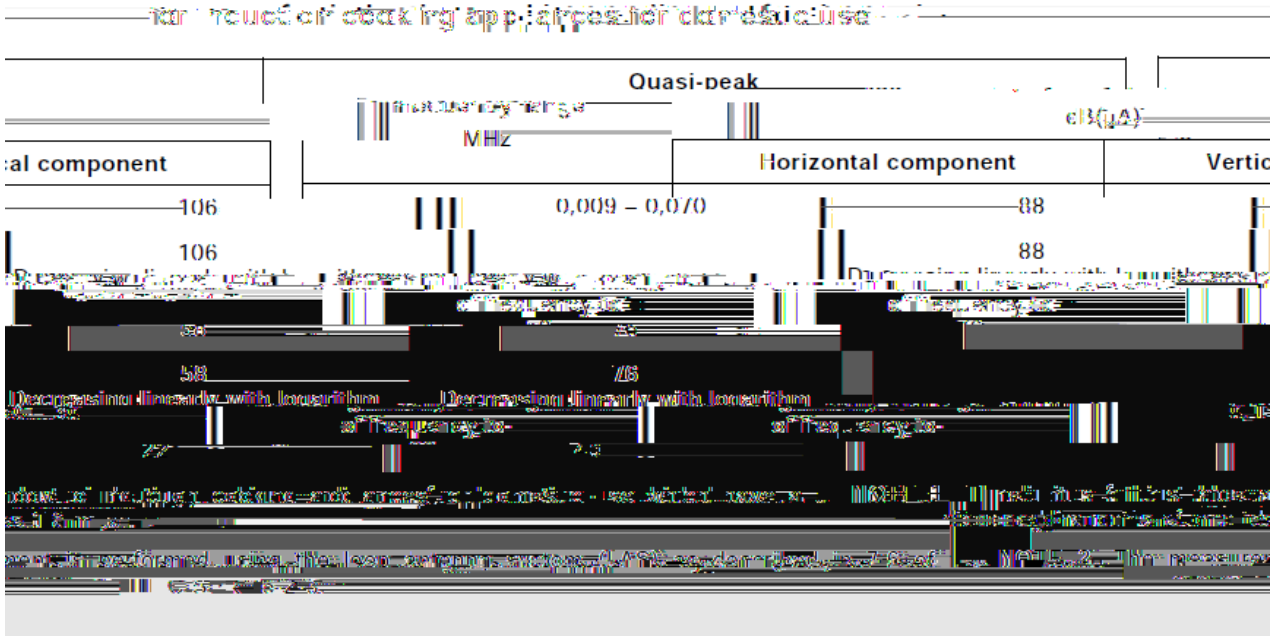



Table B.3 – Limits of the magnetic field induced current in a 2 m loop antenna



The appliance shall be operated from a supply that provides the rated voltage and the rated

according to the manufacturer’s instructions, which take precedence) which just activates the smallest coil, or all coils of the zone, respectively.

Cooking zones which are not intended for use with even vessels (e.g. wok-zones) shall be measured with the vessel provided together with the hob, or with the vessel recommended by the manufacturer.

Standard cooking vessels (dimension of the contact surface) are:

– 110 mm;

– 145 mm;

– 180 mm;

– 210 mm;

– 300 mm.

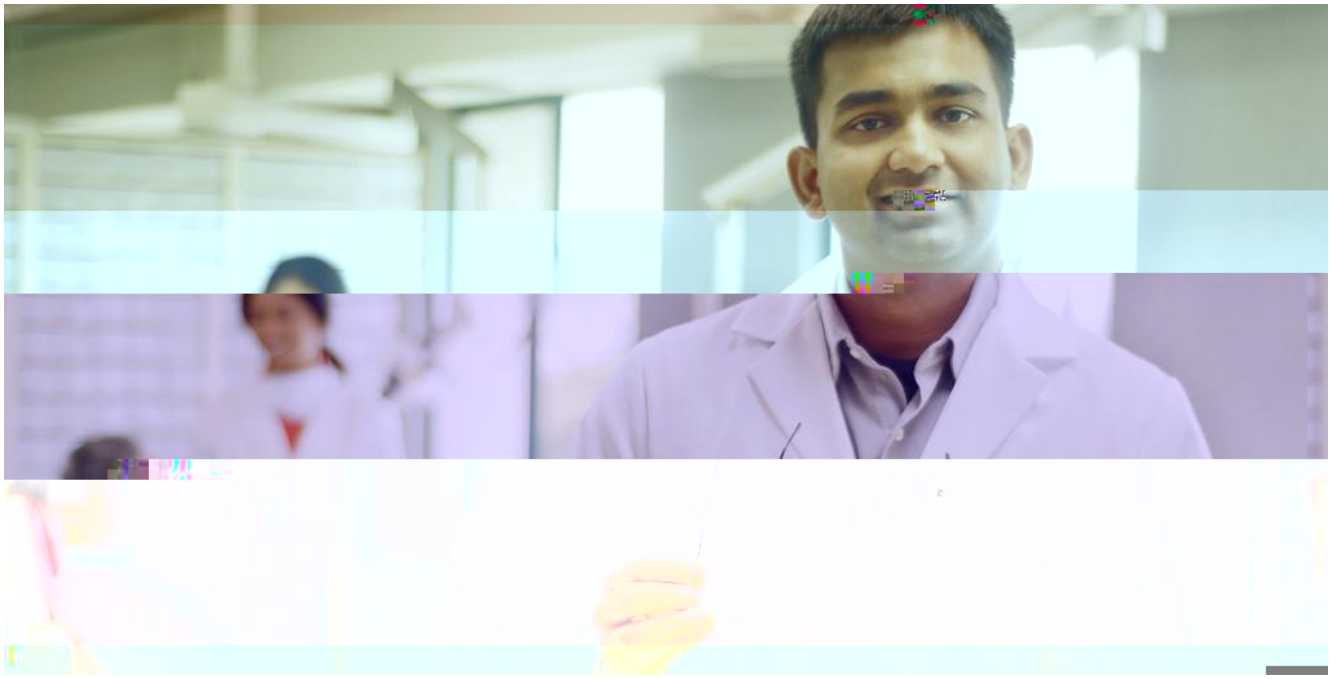
Material of the vessel: the induction cooking method has been developed for ferromagnetic utensils. For this reason, measurements shall be made with enamelled steel vessels.

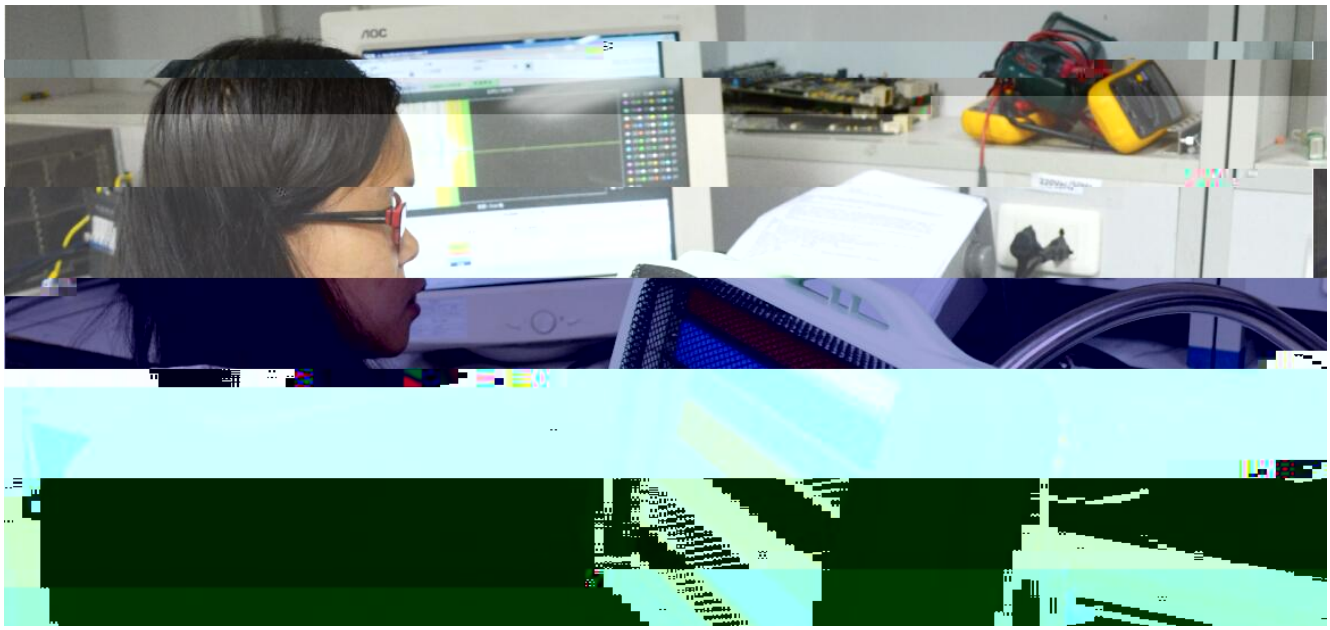
The vessel bottom shall be concave and shall not deviate from flatness by more than 0,6 % of its diameter at the ambient temperature 20 °C ±5 °C.

6% 20 °C ±5 °C.

NOTE Some vessels on the market are manufactured from alloys with a ferromagnetic portion. However, these

文/华通威 安规检测部



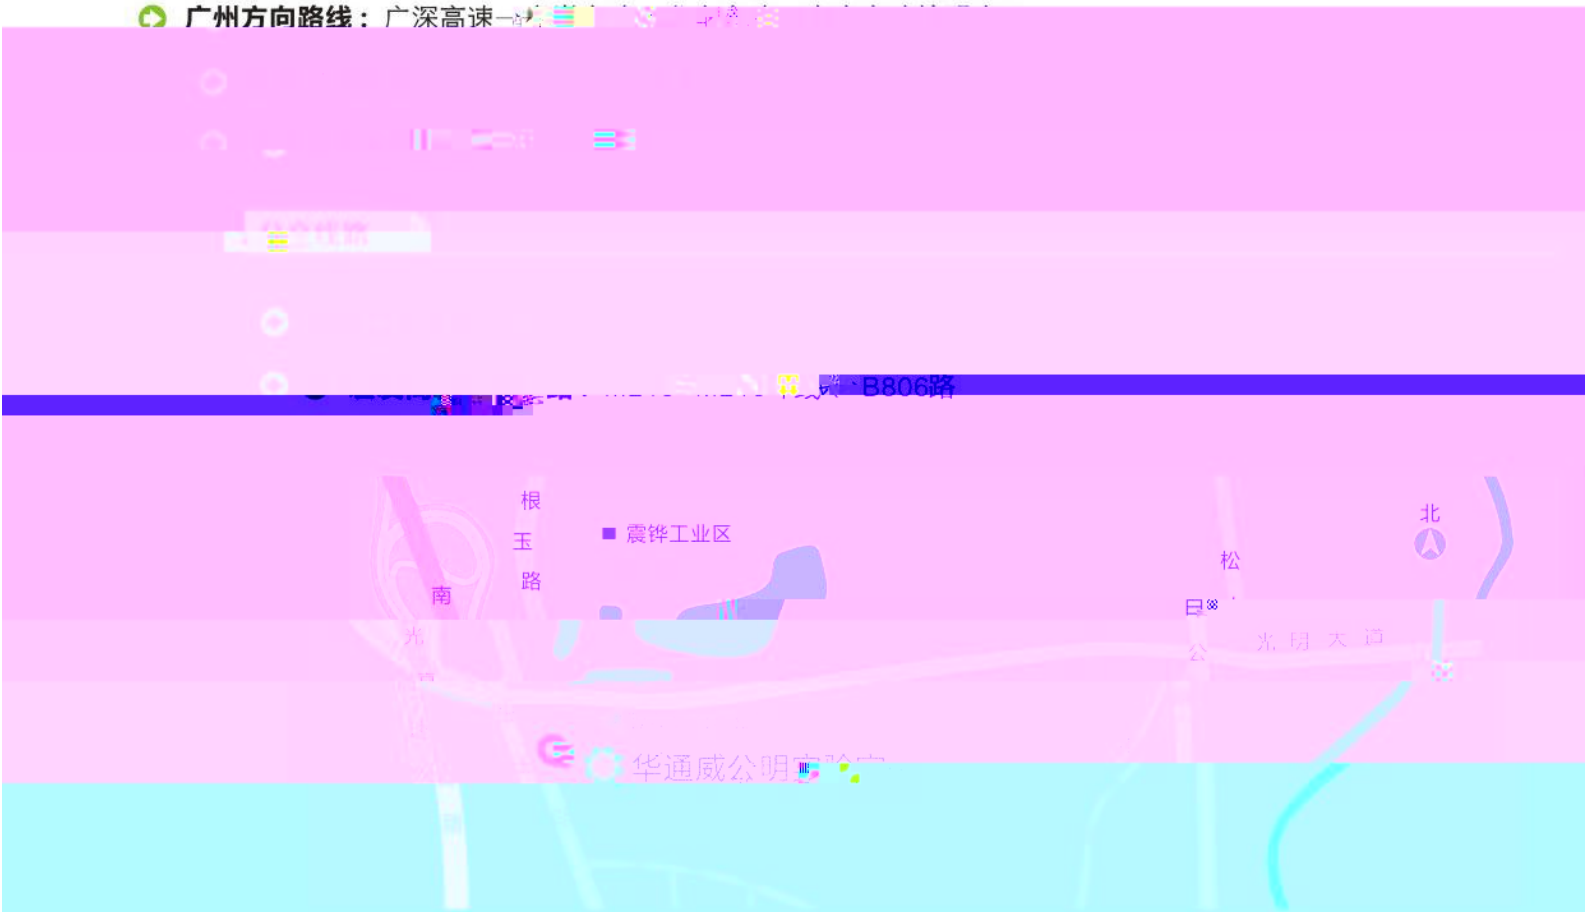

AOC



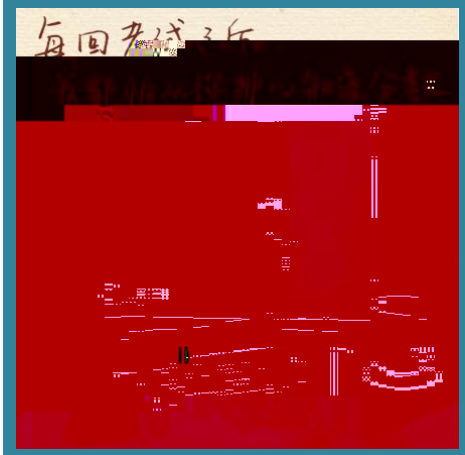
## 公明实验室交通指南

### 自驾车线路

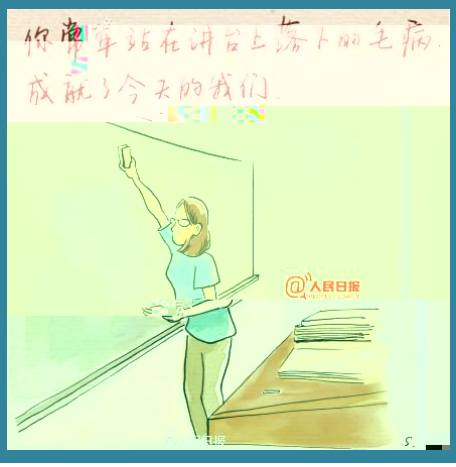
**广州方向路线：** 广深高速—

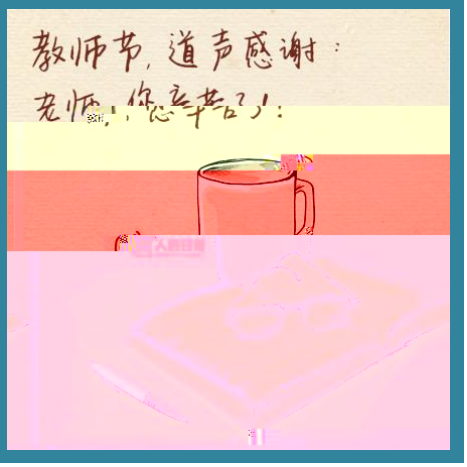





我甚至想知道你的头发白了多少，
还硬朗吗，腰腿疼吗？
@人民日报


@人民日报


教师节，道声感谢：
老师，您辛苦了！